

GIGARAILER

by REXQUOTE

The Gigarailer is Rexquote's most powerful machine range. Weighing a formidable 28-30 tonnes, fitted with heavy duty road axles, densely filled chassis weights and counterweight along with specially engineered soft foam filled super-single tyres, this machine is capable of unrivalled stability when lifting up to 15 tonnes (subject to local regulations). The purpose made chassis with extreme duty road axles married to the well-proven Terex 1604 road rail upper and in-house manufactured lightweight front-end equipment produces not only superior lifting ability, but also an accomplished digging machine.

Key Features:

- Full attachment interchangeability between the Gigarailer and the Case 988 based Superailer and Megarailer.
- Available with one or two man cab.
- Gigarailer is capable of complying with all current and expected Network Rail standards.
- Equipped to tow up to 60 tonne on suitable compatible trailers with either air or hydraulic service braking systems as an option.

Download our Product Datasheet

GIGARAILER by REXQUOTE



The Gigarailer is Rexquote's most powerful machine yet.


Weighing a formidable 20 tonnes and 10m³ with heavy duty steel roller drums, ideal for dusty, rocky and uneven terrain, the Gigarailer is equipped with 300hp and 3000kg of lifting capacity, making it capable of controlled stability when lifting up to 10 tonnes (subject to local regulations).

The program made possible with extensive duty road roller mounted to the well proven Terex 2804 road roller chassis and features maintenance friendly front loader equipment.

- Full attachment interchangeability between the Gigarailer and the correct machine base rollers.
- Available with one or two rear sets of standard heavy equipment.
- Gigarailer is capable of working with all correct and approved Rexquote Roll standards.
- Equipped to use 30 tonnes capacity bucket with either air or hydraulic braking systems as an option.



Rexquote Terex 2804 Gigarailer

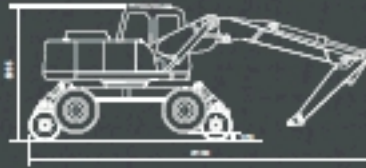

Transport Dimensions (mm)



Storage Dimensions (mm)



Reach (m)

Specifications

Overall length	8.16 m
Width	2.62 m
Height - on all wheels	3.23 m
Height - on road wheels	3.02 m
Weight	20,000 kg
Clear height	~1.87 m
Maximum rated speed for use	15 km/h
Maximum travel speed	32 km/h
Maximum self-level - travelling	370 mm (15")
Maximum self-level - working	312 mm (12")
Maximum self-grade	1 in 30
Maximum corner radius	62 m
Tyre size - front/rear	375/65-20
	Roller/roller travel pattern
	Roll - Drive Roll
	Drive Roll
	Drive Roll
Rated power level (D1) at	224.48 (328)
Rated power level	70.48 (94)
Roll wheel diameter	1000 mm
Towing capacity	over 10,000 kg
T roller jack (max when pressure deflated)	400 ton



TEREX
 Drive Roll - Rollers
 Rollers/rollers 1000 125 10
 Tel: +61 (0)27 7621 Fax: +61 (0)27 67176



REXQUOTE
 Equipment Limited, Southgate Industrial Park
 Belmont, Victoria, Australia 3105
 Tel: +61 (0)32 812200 Fax: +61 (0)32 812211
 www.rexquote.com.au info@rexquote.com.au